



README Document for

Nimbus 4 THIR

Temperature-Humidity Infrared Radiometer

Level-1 Data Products:

THIRN4L1CH67

THIRN4L1CH115

THIRN4IMCH67

June 28, 2017

Version 1.6

James Johnson

README document for Nimbus 4 THIR

| Revision date | Changes | Author |
|---------------|---|--------------------|
| 04/27/2009 | Initial version | Jean-Jacques Bedet |
| 11/22/2010 | Minor spelling corrections, format issues | James Johnson |
| 05/09/2011 | QA information added | James Johnson |
| 08/12/2011 | Image Product, Change WIST to Reverb | James Johnson |
| 06/21/2013 | File name convention changes, duplicates | James Johnson |
| 01/31/2017 | Product correctly named L1 instead of L2 | James Johnson |
| 06/28/2017 | Updated URLs in section 4 and 6 | James Johnson |

Table of contents

| | | |
|-------|--|----|
| 1 | Introduction..... | 5 |
| 1.1 | Brief Background..... | 5 |
| 1.2 | Brief Background on Instruments..... | 5 |
| 1.3 | Brief background on algorithms | 7 |
| 2 | Data Organization | 7 |
| 2.1 | Background..... | 7 |
| 2.2 | Granularity | 7 |
| 2.3 | File Naming Convention..... | 7 |
| 2.4 | File format (TAP) | 8 |
| 2.4.1 | TAP bytes..... | 8 |
| 2.4.2 | TAP headers..... | 9 |
| 2.4.3 | Nimbus IV THIR Word | 9 |
| 2.5 | Data Structure Inside a File..... | 10 |
| 2.6 | Key metadata fields..... | 10 |
| 3 | Data contents..... | 11 |
| 4 | Data services | 11 |
| 5 | Data interpretation and screening | 11 |
| 5.1 | Geolocation..... | 11 |
| 6 | More information | 12 |
| 6.1 | Point of contact | 12 |
| 6.2 | Nimbus IV references | 12 |
| 7 | Appendices..... | 13 |
| 7.1 | Example of a C routine to read TAP headers | 13 |
| 7.2 | Example on how to read a 36 bit binary word using C..... | 13 |
| 7.3 | Description of all metadata fields | 14 |
| 7.4 | Description of orbit documentation records | 16 |
| 7.5 | Description of Data Record Documentation..... | 18 |
| 7.6 | Description of a Swath Data Record..... | 19 |
| 7.7 | Detailed tables describing all flag fields..... | 20 |
| 7.7.1 | Definition of flags describing each THIR swath | 20 |
| 7.7.2 | Definition of flags for individual measurements | 21 |
| 7.8 | Quality assurance procedures | 21 |
| 7.8.1 | <u>Data Producer QA</u> | 21 |
| 7.8.2 | <u>Physical QA</u> | 22 |
| 7.8.3 | <u>Science QA</u> | 22 |
| 7.9 | Image Files..... | 22 |
| 7.10 | Acronyms | 23 |

Illustration Index

| | |
|--|----|
| Figure 1: Nimbus IV THIR Optical Schematic | 6 |
| Figure 2: Data restoration process | 8 |
| Figure 3: Nimbus IV THIR data structure | 10 |
| Figure 4: Nimbus IV anchor points | 12 |

Table Index

| | |
|---|----|
| Table 1: Nimbus IV THIR XML metadata description fields | 17 |
| Table 2: Nimbus IV THIR Orbit Documentation record | 18 |
| Table 3: Nimbus IV THIR Data Record Documentation | 19 |
| Table 4: Nimbus 4 THIR Swath Data Record | 20 |
| Table 5: Nimbus IV THIR swath flag definition | 21 |
| Table 6: Nimbus IV THIR individual measurement flags | 21 |

1 Introduction

1.1 Brief Background

This document applies to the Nimbus IV Temperature-Humidity Infrared Radiometer (THIR) 6.7 micron and 11.5 micron channel Level-1 experiment.

The Nimbus IV satellite was successfully launched on April 8 1970. The IDCS, RTTS, IRIS, MUSE, and IRLS experiments were essentially the same as those flown on Nimbus III. The Nimbus IV SIRS experiment had the added capabilities of determining the tropospheric water vapor content and the spatial scan for increased coverage. Global analyses of upper-level pressure and temperature were begun using SIRS data. Nimbus IV Temperature-Humidity Infrared Radiometer (THIR) experiment replaced the Nimbus III HRIR and MRIR experiments. Three experiments were added to the Nimbus IV: The Filter Wedge Spectrometer (FWS), the Backscatter Ultraviolet Spectrometer (BUV), and the Selective Chopper Radiometer (SCR).

The orbit of the satellite can be characterized by the following:

- circular orbit at 590 nautical miles
- inclination of 81 degrees
- period of an orbit is about 107 minutes
- orbits cross the equator at 26 degrees of longitude separation
- sun-synchronous

The Nimbus IV THIR 6.7 micron data are available from April 14, 1970 (Day of year 104) through March 25, 1971 (Day of year 084). The 11.5 micron data are available from April 13, 1970 (Day of year 103) through March 27, 1971 (Day of year 086).

1.2 Brief Background on Instruments

The THIR is a two channel high resolution scanning radiometer designed to perform two major functions:

- 6.7 micron channel gives information on the moisture content of the upper troposphere and stratosphere and the location of jet streams and frontal systems. The water vapor channel has a resolution of the sub-point is 22 km and operates mostly at night.

README document for Nimbus 4 THIR

- 10.5 – 12.5 micron channel provides both day and night cloud top or surface temperatures. The ground resolution at the sub-point is 8 km and operates day and night.

The optical system of the Nimbus IV THIR instrument consists of a scan mirror, a telescope, and a dichroic beam splitter and is illustrated in Figure 1. The scan mirror is inclined to 45 degrees to the axis of rotation (scans perpendicular to flight path) and the scan rate operation is 48 revolutions per minute. The field of view scans across the earth from east to west in daytime and west to east at night when traveling northward and southward respectively. A dichroic beam splitter divides the energy into two channels. A 21 milliradian channel detects energy in the 6.7 micron band while a 7.0 milliradian channel detects energy in the 10.5-12.5 micron band. In both cases a germanium immersed thermistor bolometer is used.

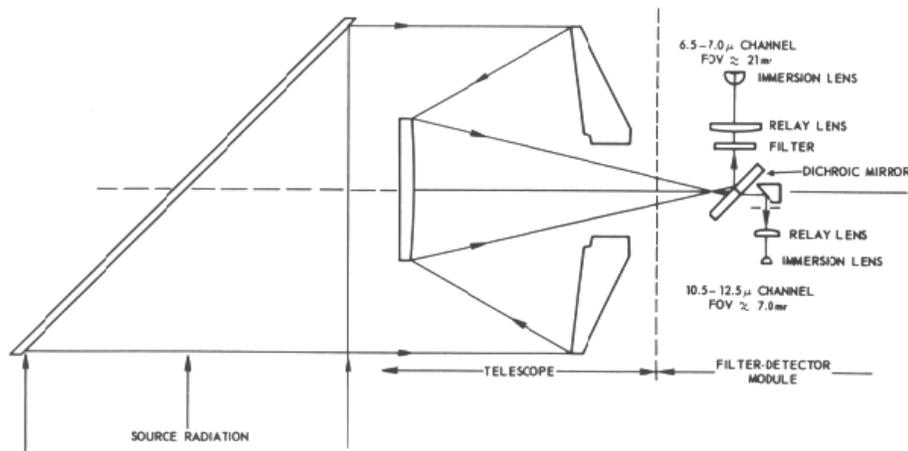


Figure 1: Nimbus IV THIR Optical Schematic

README document for Nimbus 4 THIR

1.3 Brief background on algorithms

The Nimbus IV THIR data was generated from the spacecraft telemetry, attitude data, orbital data. Digitized radiation data, and the Nimbus radiometer calibration package. The data were created on IBM computers using a 36-bit architecture. Further information can be found on the Nimbus IV Users' Guide.

2 Data Organization

2.1 Background

2.2 Granularity

The Nimbus IV 6.7 and 11.5 micron THIR data were originally archived on 7-track tapes. The data were stored in 36-bit IBM binary format. A Canadian company (JBI) was contracted to restore to disks all Nimbus IV THIR tapes. The content of each tape was written using a proprietary format (TAP) that allowed records to be flagged. Since tapes may contain several files and in some cases several orbits, the content of each file on a tape was retrieved and stored in a separate file using the same TAP format.

The Nimbus IV THIR tapes were archived at the Washington National Records Center. The tape recovery process involved using specially developed tape drives, bit detection and processing techniques to read the 800 bpi, 7-track tapes and store the recovered data in TAP (tape emulation format). Nimbus IV THIR data covered about 11 months of observations, and about 98% of the 7-track tapes were successfully restored.

Because a tape may contain multiple files, and in some cases multiple orbits, each tape was read and the content of each file stored on a separate file on disk. The overall TAP format and data on tape was preserved. The TAP files were archived and ingested at the Goddard Earth Sciences Data and Information Services Center (GES DISC) and are available for users to download.

2.3 File Naming Convention

The Nimbus IV THIR level 1 data are named according to the following convention:

Nimbus4-THIR<channel>_<YYYY>m<MMDD>t<hhmmss>_o<orbit>_<version>.TAP

README document for Nimbus 4 THIR

where:

channel: is either CH67 for the 6.7 micron channel or CH115 for the 10.5-12.5 micron window channel

YYYYmMMDDthhmmss is the starting date and time (UTC) when the data was collected

YYYY: 4 digit calendar year (e.g. 1971)

MM: 2 digit month (e.g. 02 for February)

DD: 2 digit day of the year (e.g. 05 for day five)

hh: 2 digit hour (0-23) (e.g. 06 hours)

mm: 2 digit minute (0-59) (e.g., 44 minutes)

ss: 2 digit seconds (0-59) , (e.g. 36 seconds)

orbit: is the orbit number


version: indicates the collection version (e.g. 001)

Note: in case of duplicates (from a backup tape) with the same file name, the version will have -dupD appended to it where D is an integer starting with 1 (first), 2 (second), etc.

2.4 File format (TAP)

2.4.1 TAP bytes

Each byte restored from a 7-track tape is stored in a byte as described in the following Figure 2. The 7th bit is flagged to 1 when a byte was not restored correctly; otherwise it is set to 0. The 6th bit is the tape parity bit as stored on tape.

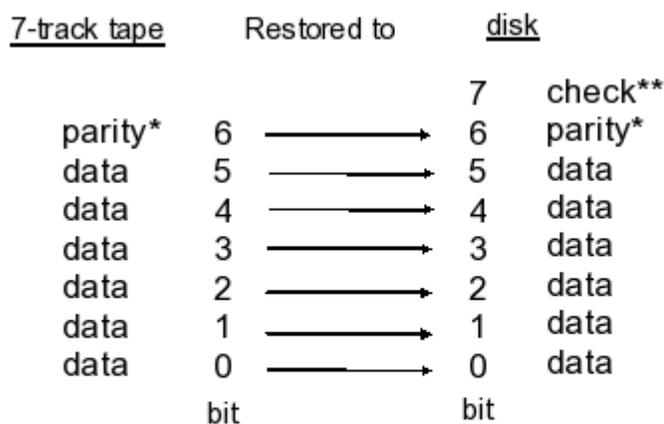

(*) tape parity check

(**) 0: byte was successfully restored from tape, 1: byte was not successfully restored from tape

Figure 2: Data restoration process

2.4.2 TAP headers

TAP headers are interleaved between the Nimbus IV THIR data records to indicate the length of the following and preceding data records. A TAP header is a 4 byte record which follows the following convention.

- A number greater than zero indicates the length of a record
- A negative number indicates that a record has bytes that could not be restored from tapes and filled with zeros. The length of a record is obtained by taking the absolute value.
- a zero indicates the start of a file
- Two consecutive TAP headers with zero values are used to specify the end of a file.
- A data record is preceded by a header and followed by a header listing the length of the data record

An example on how to read a TAP header is illustrated in Appendix 7.1

2.4.3 Nimbus IV THIR Word

The basic unit of the Nimbus IV data is a word which is a 36-bit IBM binary word. This means that in order to extract a 36-bit word from the restored files, six bytes (8-bits) must be read, the 6th and 7th bit removed from each byte, and the remaining bits of each byte combined.

To preserve space while maintaining a good resolution, a scaling technique was used when the data was originally created and stored on 7-track tapes. The idea was to multiply a number by a factor before storing the value to tape. Nimbus IV data can be converted back to the initial value by dividing the stored value on tape by $2^{(35-B)}$, where B is the scaling factor listed on the Nimbus IV Data record format tables.

A word of 36 bits with a scaling factor of B is converted by using the relation:
value = (integer value of 36 bits) / $(2^{(35-B)})$

When a word is divided in two $\frac{1}{2}$ Word (WordD, and WordA), the actual values are converted by using the relation:

A wordD of 18bits with a scaling factor of B is converted in real by using the relation:
value = (integer value of 18 bits) / $(2^{(17-B)})$

A wordA of 18bits with a scaling factor of B is converted in real by using the relation:
value = (integer value of 18 bits) / $(2^{(35-B)})$

The scaling factor is mentioned and used in tables describing the Nimbus IV THIR records.

An example on how to read a 36-bit IBM binary word in C is illustrated in Appendix 7.2

2.5 Data Structure Inside a File

Two TAP 4 byte headers are stored before and after each Nimbus IV THIR records. The first Nimbus IV THIR record is an orbit data document record (102 bytes) followed by multiple data records. A Nimbus IV THIR data record is composed of a Data record documentation followed by several swath data records. The length of a data record (L) in words can be computed using the relation.

$$L = (\text{swaths per records}) * (\text{words per swath}) + (\text{number of nadir angles}) + 7$$

The overall structure of the Nimbus IV files is depicted in Figure 3

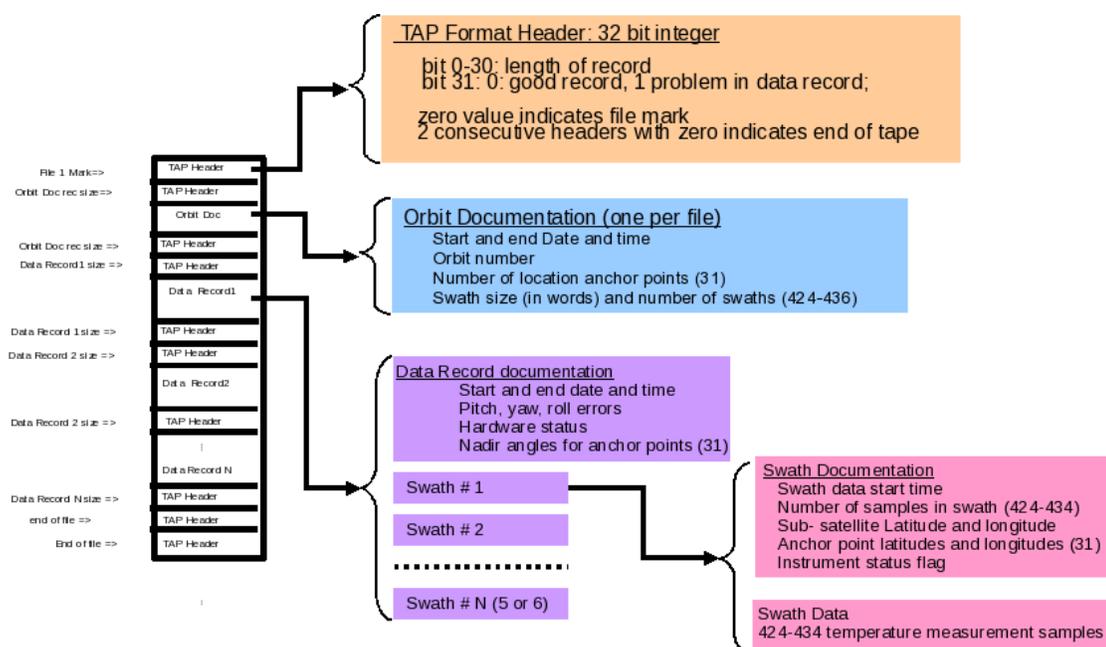


Figure 3: Nimbus IV THIR data structure

2.6 Key metadata fields

These are most likely to be used by users:

Temporal

- start Date / Time
- end Date/ Time

README document for Nimbus 4 THIR

Geolocation

- latitude
- longitude

3 Data contents

Described below are all the parameters associated with the Nimbus IV THIR files.

Table 2 (page 19) describes in details all the parameters associated with an orbit. There is one orbit documentation record per file.

Table 3 (page 20) describes in details all fields in a record documentation. There is one data record documentation per data record

Table 4 (page 21) describes in details all fields in a swath data record. There are multiple swath data records in a single data record.

4 Data services

The data product landing pages provide information about the data, as well as links to download the data files and relevant documentation:

https://disc.gsfc.nasa.gov/datacollection/THIRN4L1CH67_001.html

https://disc.gsfc.nasa.gov/datacollection/THIRN4L1CH115_001.html

https://disc.gsfc.nasa.gov/datacollection/THIRN4IMCH67_001.html

5 Data interpretation and screening

5.1 Geolocation

The Nimbus pointing accuracy is better than 1 degree in pitch and roll with 1 degree pointing error that corresponds to a sub-satellite geolocation error of 20 km. The THIR radiometer scans the earth in a clockwise direction from right to left. Each earth scan is defined by a family of mirror nadir angles. For each mirror angle, the latitude and longitude of the corresponding point on the earth's surface is recorded. The position of individual samples between two anchor points is determined by interpolation.

The latitude and longitude of the corresponding point on the earth's surface are used as references in computation of positions for each sample. There is still no information available describing how many anchor points were used for a swath. Using landmarks and Nimbus II data (e.g. Lake Michigan) it seems that 11 anchor points centered around the subsatellite points were used, instead of the 31 points. This issue is still being investigated.

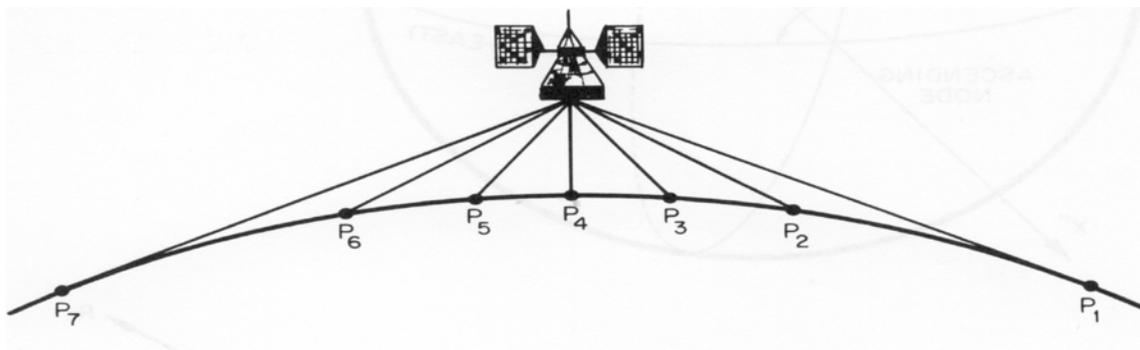


Figure 4: Nimbus IV anchor points

6 More information

6.1 Point of contact

URL: <https://disc.gsfc.nasa.gov/>

Name: GES DISC Help Desk

E-mail: help-disc@listserv.gsfc.nasa.gov

Phone: 301-614-5224

Fax: 301-614-5268

Address: Goddard Earth Sciences Data and Information Services Center

Code 610.2

NASA Goddard Space Flight Center, Greenbelt, MD 20771, USA

6.2 Nimbus IV references

- Nimbus IV Users' Guide, March 1970

7 Appendices

7.1 Example of a C routine to read TAP headers

Following is an example on how to extract the record length from the TAP headers

```
int ReadHeader(ifd)      /* read header */
int ifd;

/* This function reads a TAP header (4 bytes) and return
   the size in bytes of the next record to read
   input
       ifd: file reference
   output
       reclen: size of the next record in bytes
*/
{
unsigned char    bytebuf[200];
int    j, size, value,reclen,signbit;

    size = read( ifd, bytebuf, 4) ;      /* read header */

    value = 0;
    for (j=0 ; j<=3 ; j++ )
        {
            value = value << 8;        /* shift left by 8 bits */
            value = value | bytebuf[j];
        }
    reclen = value;
    return reclen;
}
```

7.2 Example on how to read a 36 bit binary word using C

Below is an example of a C routine to extract the 36 bit word (out of 6 unsigned bytes), remove the most significant bits of each byte and store the content into a long long interger.

```
long long GetWord (initval,len)
unsigned char  initval[];      /* buffer containing the binary data */
int len;                      /* number of bytes */
/* this function removes the 2 most significant bits of each byte
   and concatenates the "len" bytes (with the 2 bits removed)
   into an integer
   input
       initval array containing the bytes
```

README document for Nimbus 4 THIR

```
        len      number of bytes to clean and concatenate
    output
        value     integer containing the bytes cleaned and concatenated
*/
{
int j,pos;
unsigned char  byteclean;
long long value,signbit,res, signval;

value = 0;
pos=0;
signval = 1;
for (j=0 ; j<len ; j++ )
    {
        if ( j == 0 )
            {
                signbit = initval[pos] & 0x20; /* get sign bit */
                if ( signbit == 32 )
                    {
                        value = value << 5; /* shift left by 5 bits
                                                to remove sign bit */
                        signval = -1;
                        byteclean = initval[pos] & 0x1f;
                        value = value | byteclean;
                    }
                else
                    {
                        value = value << 6; /* shift left by 6 bits
                                                to remove sign bit */
                        byteclean = initval[pos] & 077; /* remove the 2
                                                            most significant bits */
                        value = value | byteclean;
                    }
            }
        else
            {
                value = value << 6; /* shift left by 6 bits */
                byteclean = initval[pos] & 077; /* remove the 2 most
                                                            significant bits */
                value = value | byteclean;
            }
        pos++;
    }
value = value*signval;
return value;
}
```

7.3 Description of all metadata fields

Following is a list of the XML metadata fields and a brief description for the Nimbus IV THIR data.

Table 1: Nimbus IV THIR XML metdata description fields

README document for Nimbus 4 THIR

| field | Description | value |
|----------------------------|--|---|
| Shortname | Short product name | THIRN4L1CH67 or THIRN4L1CH115 |
| Longname | Long product name | Nimbus-4/THIR Level 1 Earth's Cloud Cover at Night, Temperature of Cloud Tops and Terrain Features, 6.7 microns (or 11.5 microns) |
| VersionID | Product or collection version number. Duplicate named files will have -dup1 appended. Does not refer to the algorithm version of the processed data. | Example: 001 or 001-dup1 |
| GranuleID | Granule ID, i.e. the name of the file | Example: Nimbus4-THIRCH67_1970m0801t141638_o01043_v001.TAP |
| Format | Proprietary File Format (see section on TAP for a full description) | TAP |
| TotalSize | Total Size of the granules in Bytes | Example: 4855962 |
| Insert Time | Date and time when the granule was inserted into the DISC. The date is YYYY-MM-DD and the time is in hh-mm-ss format | Example: 2010-09-02 17:20:44 |
| TimeCoverage BeginDateTime | Beginning Date and time when the data was collected from the satellite. The date is YYYY-MM-DD and the time is in hh-mm-ss format | Example: 1970-08-01 14:16:38 |
| TimeCoverage EndDateTime | End Date and time when the data was collected from the satellite. The date is YYYY-MM-DD and the time is in hh-mm-ss format | Example: 1970-08-01 15:11:08 |
| File Checksum Type | Type of Checksum | CRC32 |
| File Checksum Value | Value of the checksum using cksum | Example: 3378917185 |
| File Size in Bytes | Size of the file in Bytes | Example: 4855962 |

README document for Nimbus 4 THIR

| field | Description | value |
|---------------------|---|--|
| | | |
| Platform instrument | Name of the instrument | THIR |
| Platform Sensor | Name of the sensor | THIR |
| Gpolygon latitude | Latitudes of the polygons that represent the satellite coverage. Rectangles have been selected in this case. Each point of a rectangle is identified by its latitude and longitude | Example: -80.000000 -90.000000 -90.000000 -80.000000 |
| Gpolygon longitude | Longitudes of the polygons that represent the satellite coverage. Rectangles have been selected in this case. Each point of a rectangle is identified by its latitude and longitude | Example: 180.000000 180.000000 -180.000000 -180.000000 |
| Orbit | Nimbus IV satellite orbit number. There is one orbit per file. A given orbit may have several files (partial orbits or data collected from different stations) | Example: 1043 |
| Average Elevation | Average elevation in km of the nimbus IV satellite during an orbit | Example: 1140.915 |
| Station Code | DAF Station identification code | Example: 2 |
| Elapsed_Min_Time | Duration in minutes of data collected during an orbit | Example: 25 |

7.4 Description of orbit documentation records

This record is unique for each file and provides information on the starting and end Date/time for a file, size and number of swaths, orbit number, and the number of anchor points used to identify the geo-location of the data.

README document for Nimbus 4 THIR

Table 2 Describes in details the fields, units, and scaling factors.

Table 2: Nimbus IV THIR Orbit Documentation record

| Word No. | Quantity | Units | Scaling | Remarks |
|----------|--------------------------|--------------|---------|--|
| 1 | Dref | ----- | B=35 | Equals 67 for 6.7 micron channel or 115 for 11.5 micron channel |
| 2 | Date | MMDDYY | B=35 | Date of interrogation for this orbit (MMDDYY 2/5/64 is (020504) in octal. Date of interrogation seems to be the processing date. |
| 3 | Nimbus Day | ----- | B=35 | Start day of the year (1970) for this file (orbit) |
| 4 | Hour | Hh | B=35 | Start hour for this file(orbit) |
| 5 | Minute | mm | B=35 | Start minute for this file(orbit) |
| 6 | Second | Ss | B=35 | Start seconds for this file(orbit) |
| 7 | Nimbus Day | ----- | B=35 | End day of the year (1970) for this orbit |
| 8 | Hour | Hh | B=35 | End hour for this orbit |
| 9 | Minute | mm | B=35 | End minute for this orbit |
| 10 | Second | Ss | B=35 | End seconds for this orbit |
| 11 | Mirror Rotation | Deg/Sec | B=26 | Rotation rate of radiometer mirror |
| 12 | Sampling Frequency | Samples /Sec | B=35 | Digital sampling frequency per second of vehicle time |
| 13 | Orbit Number | ----- | B=35 | Orbit Number |
| 14 | Station Code | ----- | B=35 | Data Acquisition Facility (DAF) Station identification |
| 15 | Swath Block size | ----- | B=35 | Number of 36-bit words per swath |
| 16 | Swaths/records | ----- | B=35 | Number of swath per record |
| 17 | Number of locator points | ----- | B=35 | Number of anchor points per swath for which latitudes and longitudes are computed |

7.5 Description of Data Record Documentation

The data record documentation is described in Table 3

Table 3: Nimbus IV THIR Data Record Documentation

| Word No. | Quantity | Units | Scaling | Remarks |
|-----------------|---------------------------|--------------|----------------|---|
| 1D | Nimbus Day | ----- | B=17 | Start Day of the year for this data record |
| 1A | Hour | hh | B=35 | Start hour for this data record |
| 2D | Minute | mm | B=17 | Start minute for this data record |
| 2A | Second | ss | B=35 | Start seconds for this data record |
| 3D | Roll Error | Degrees | B=14 | Roll Error at start Date/time (word 1 and 2) for this record |
| 3A | Pitch Error | Degrees | B=32 | Pitch Error at start Date/time (word 1 and 2) for this record |
| 4D | Yaw Error | Degrees | B=14 | Yaw Error at start Date/time (word 1 and 2) for this record |
| 4A | Height | Km | B=35 | Height of the spacecraft at start Date/time (word 1 and 2) for this record |
| 5D | Detector Cell temperature | Degrees K | B=17 | Measured temperature of detector cell at start Date/time (word 1 and 2) for this record |
| 5A | Electronics temperature | Degrees K | B=35 | Measured temperature of electronics at start Date/time (word 1 and 2) for this record |
| 6D | Reference Temperature A | Degrees K | B=17 | Measured Temperature of housing at start Date/time (word 1 and 2) for this record |
| 6A | Reference Temperature B | Degrees K | B=35 | Measured Temperature of housing at start Date/time (word 1 and 2) for this record |
| 7D | Reference Temperature C | Degrees K | B=17 | Measured temperature of housing at start Date/time (word 1 and 2) for this record |

README document for Nimbus 4 THIR

| Word No. | Quantity | Units | Scaling | Remarks |
|----------|-------------------------|-----------|---------|---|
| 7A | Reference Temperature D | Degrees K | B=35 | Measured temperature of housing at start Date/time (word 1 and 2) for this record |
| 8 | Nadir Angle | Degrees | B=29 | Nadir angle corresponding to the first anchor point and measured in the plane of the radiometer |
| ----- | | | | |
| ----- | | | | |
| N | Nadir Angle | Degrees | B=29 | Nadir angle corresponding to the last anchor point and measured in the plane of the radiometer |

7.6 Description of a Swath Data Record

Table 4: Nimbus 4 THIR Swath Data Record

| Word No. | Quantity | Units | Scaling | Remarks |
|----------|-----------------|---------|---------|--|
| (N+1)D | seconds | ss | B=8 | Seconds elapsed since the start of the Date/time of this data record |
| (N+1)A | Data population | ----- | B=35 | Number of data points in this swath |
| (N+2)D | Latitude | Degrees | B=11 | Latitude of the subsatellite point for this swath |
| (N+2)A | Longitude | Degrees | B=29 | Longitude of the subsatellite point for this swath, positive westward 0 to 360 |
| (N+3) | Flags | ----- | ----- | Reserved for flags describing this swath |
| (N+4)D | latitude | Degrees | B=11 | Latitude of viewed point for the first anchor point |
| (N+4)A | Longitude | Degrees | B=29 | Longitude of viewed point for the first anchor point |

README document for Nimbus 4 THIR

| Word No. | Quantity | Units | Scaling | Remarks |
|----------|-----------|---------|---------|--|
| ----- | | | | |
| ----- | | | | |
| (N+3+M)D | latitude | Degrees | B=11 | Latitude of viewed point for the Mth anchor point |
| (N+3+M)A | Longitude | Degrees | B=29 | Longitude of viewed point for the Mth anchor point |
| (N+4+M)D | THIR Data | Degrees | B=14 | THIR temperature measurement |
| (N+4+M)A | THIR Data | Degrees | B=32 | THIR temperature measurement |
| ----- | | | | |
| ----- | | | | |
| (N+K)D | THIR Data | Degrees | B=14 | THIR temperature measurement |
| (N+K)A | THIR Data | Degrees | B=32 | THIR temperature measurement |

7.7 Detailed tables describing all flag fields

7.7.1 Definition of flags describing each THIR swath

The flags describing the status of each THIR are listed in Table 5

Table 5: Nimbus IV THIR swath flag definition

| Flag | Bit | Definition | Yes | No |
|------|-----|--|-----|----|
| 1 | 35 | Summary Flag. All checks defined by flags 2 through 12 are satisfactory. (Each flag is zero) | 0 | 1 |
| 2 | 34 | Consistency check between sampling rate, vehicle time, and ground time is satisfactory. | 0 | 1 |
| 3 | 33 | Vehicle time is satisfactory | 0 | 1 |
| 4 | 32 | Vehicle time has been inserted by flywheel | 1 | 0 |
| 5 | 31 | Vehicle time carrier is present | 0 | 1 |
| 6 | 30 | Vehicle time has skipped | 1 | 0 |
| 7 | 29 | unassigned | | |
| 8 | 28 | Sync pulse recognition was satisfactory | 0 | 1 |

README document for Nimbus 4 THIR

| Flag | Bit | Definition | Yes | No |
|------|-----|---|-----|----|
| 9 | 27 | Dropout of data signal was detected | 1 | 0 |
| 10 | 26 | unassigned | | |
| 11 | 25 | unassigned | | |
| 12 | 24 | Swath size satisfactory when compared with the theoretical swath size | 0 | 1 |
| 13 | 23 | unassigned | | |

7.7.2 Definition of flags for individual measurements

The flags describing the status of each individual measurement are illustrated in Table 6

Table 6: Nimbus IV THIR individual measurement flags

| Prefix | TAG | Definition | Yes | No |
|--------|-----|---|-----|----|
| S | 18 | The particular measurement is below the earth space threshold | 1 | 0 |
| 1 | 19 | unassigned | | |
| 2 | 20 | unassigned | | |

7.8 Quality assurance procedures

7.8.1 Data Producer QA

The Data Producer's QA information can be found in the XML metadata file under the section ProducersQA. The information begins with the following:

```
Record No, Bytes, Bad bytes
0,filemark
1,84,0
2,filemark
3,102,0
4,11928,0
:
<n-1>,11928,0
<n>,filemark
```

On each line there are 3 comma separated numbers: the first is the record number, the second is the record length in bytes, and the third is the number of bad bytes. The first Record #0 is a filemark which separates different files. Record # 1 has 84 bytes - this is the BCD header length. If the number of bad bytes is 0, this indicates the header is good. If the number is non-zero, there are bad bytes in the header. Record # 2 marks the end of the BCD header, and the start of the next file record. Record #3 has 102 bytes - this is the data header length. If the number of bad bytes is 0, this means all bytes are good, if the number is non-zero, there are bad bytes in the header. Record #4 is 11928 bytes. This is

the nominal data record length. If the number of bad bytes is 0, that indicates this data record is good, if the number is non-zero, there are bad bytes in the data record. From this point, all subsequent records are data records and should have a length of 11928 with no bad bytes. A final filemark will indicate the end of the file. Sometimes the data are split into different orbits or orbit section files, and this will be noted with another filemark

7.8.2 Physical QA

Each restored file was read and its corresponding orbit documentation was extracted and used to derive the file name and to create a XML metadata file.

For each file the number of “bad” bytes, parity errors, “bad” records was derived.

Plots of selected swath were generated (with and without a world map).

7.8.3 Science QA

The file format of the Nimbus II and III HRIR and Nimbus IV THIR are almost identical except for the first word in the orbit documentation which defines the channel window (6.7 or 11.5 micron).

7.9 Image Files

The **THIRN4IMCH67** data product contains scanned negatives of photofacsimile 70mm film strips from the Nimbus-4 Temperature-Humidity Infrared Radiometer at the 6.7 μm (water vapor) channel. The images contain primarily nighttime (image files designated with an N) and some daytime (image files designated with a D) thermal emissions of the Earth's surface showing the water vapor band at 6.7 microns. Each orbital swath picture is gridded with geographic coordinates and covers a distance approximately from the south pole to the north pole (day) and the north pole to the south pole (night). The images are saved as JPEG 2000 digital files. About 7 days of images are archived into a TAR file. The processing techniques used to produce the data set and a full description of the data are contained in section 3.4.1 of the "Nimbus IV Users' Guide."

7.10 Acronyms

DAF: Data Acquisition Facility

ECHO: EOS Clearinghouse

EOS: Earth Observing System

GES DISC: Goddard Earth Sciences Data and Information Services Center

GSFC: Goddard Space Flight Center

THIR: Temperature-Humidity Infrared Radiometer

L1: Level 1 Data

NASA: National Aeronautics and Space Administration

QA: Quality Assessment

UT: Universal Time